

The **Quick Mount Bracket** is designed for ease of installation when purchasing new poles and new fixtures. It is designed for 2x4 extruded NLS arms only.

**Finish:** 3-5 mils electrostatic powder coat. NLS' standard high quality finishes prevent corrosion protects against extreme environmental conditions.

**Compatibility:** *Fits 2X4 extruded arm.* Square Straight Steel (SSSP), Square Straight Aluminum (SSAP), Round Straight Steel (RSSP) or Round Straight Aluminum (RSAP) poles in 3"-4", or 5"-6" OD.

**Construction:** Cleat, Cleat Cover and RPA are Cast Aluminum. Grade 356 Alloy.

Extruded Aluminum arm is 6061/T3 Alloy



Project Name:

Type:

## QMB ORDERING GUIDE

Cat#

Pole Dim.

Color

Quick Mount Bracket  
(QMB)

Square  
(SQ)  
Round 3"-4" OD  
(RPA4)  
Round 5"-6" OD  
(RPA5)

Bronze Textured  
(BRZ)  
White Textured  
(WHT)  
Smooth White Gloss  
(SWT)  
Silver Metallic  
(SVR)  
Black Textured  
(BLK)  
Smooth Black Gloss  
(SBK)  
Graphite Textured  
(GPH)  
Grey Textured  
(GRY)  
Green Textured  
(GRN)  
Hunter Green Textured  
(HGN)  
Custom  
(CS)

NOTES:




701 Kingshill Place, Carson, CA 90746  
Call Us Today (310) 341-2037


[nlsighting.com](http://nlsighting.com)

## PRODUCT SPECIFICATIONS

### RPA4 / RPA5

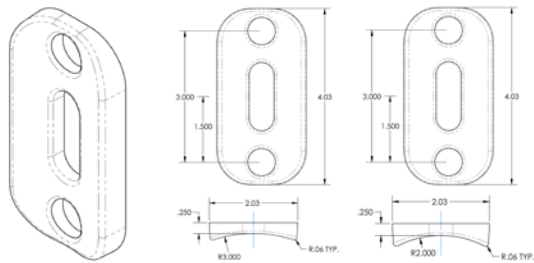

**ROUND POLE ADAPTER (RPA)**– When using round poles, specify Round Pole Adapter (RPA). Specify RPA4 when installing on 3"-4" round poles, and RPA5 when installing on 5"-6" round poles.

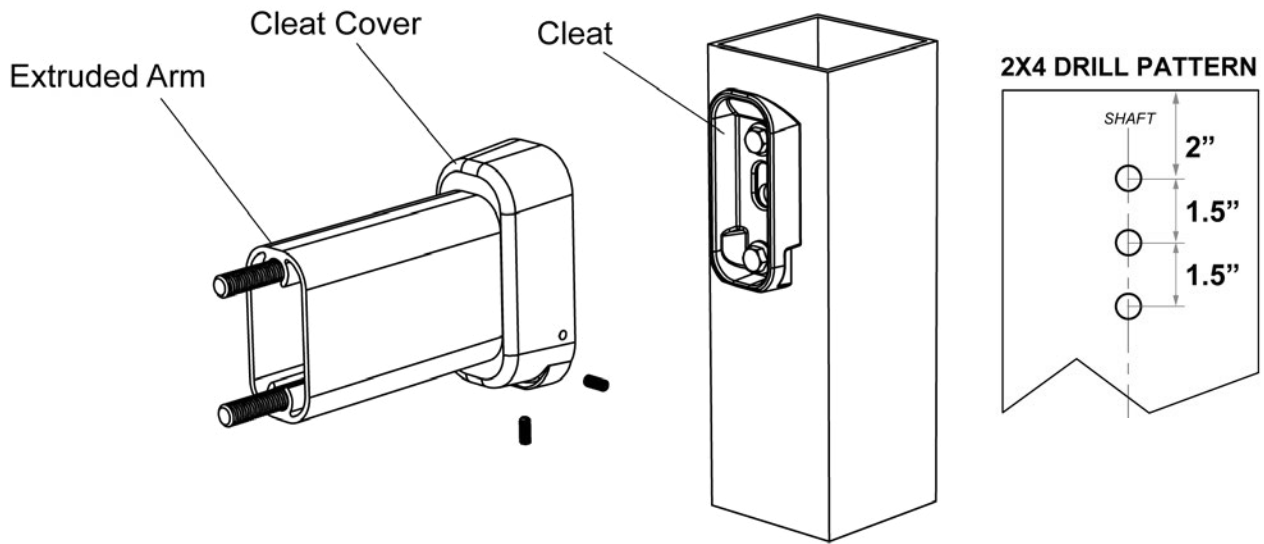

### 3-STEP INSTALLATION



#### STEP 1

Align cleat with fixture after installing on pole (apply over existing hole pattern).



#### STEP 2

Hook fixture onto QMB/RQMB cleat.



#### STEP 3

Secure (3) Set Screws into QMB/RQMB.