



LED Wattage Chart

Drive Current	32L	48L	64L
700 milliamps	71W	104W	136W
1050 milliamps	106W	156W	205W

FORM AND FUNCTION

- Sleek, low profile housing
- Engineered for optimum thermal management
- Low depreciation rate
- Optical system designed for:
 - Parking Lots
 - Commercial Applications

CONSTRUCTION

- Die Formed heavy duty Aluminum
- Corrosion resistant external hardware
- One-piece silicone gasket ensures IP-65 seal for electronics compartment
- Two-piece silicone Micro Optic system ensures IP-67 level seal around each PCB

BUY AMERICAN

To ensure the latest BAA/TAA/BABA Standards are being met, please select BAA, TAA, or BABA in the options section. Please contact the factory before placing an order for any NLS products requesting BAA (Buy American Act), TAA (Trade American Act), or BABA (Build America, Buy America).



Project Name:

Type:

VSR-1-SPMX ORDERING GUIDE

Cat#	Light Dist.	# of LEDs	Drive Current	Color Temp./CRI	Voltage
Value Series Round 1 (VSR-1)	Standard Silicone Micro Optics		Standard Configurations		Amber LED 595nm Dominant Wavelength Standard Turtle Friendly (AMBER) ^{1, 6, 7, 13} Amber LED Phosphor Converted (AMBER/PC) ^{1, 6, 7, 13} 2700K, 70 CRI (27K7) ² 2700K, 80 CRI (27K8) ² 3000K, 70 CRI (30K7) ² 3000K, 80 CRI (30K8) ² 3500K, 80 CRI (35K8) ² 4000K, 70 CRI (40K7) ² 4000K, 80 CRI (40K8) ² 5000K, 70 CRI (50K7) ² 5000K, 80 CRI (50K8) ²
	Type 2 (T2)	32 LED (32L)	700 mA (7)		
	Type 3 (T3)	48 LED (48L)	1050 mA (1)		
	Type 4 (T4)	64 LED (64L)			
	Type 5 (T5)				
	Performance Silicone Micro Optics		Standard Configurations		
	Type 4 Forward Throw Wide (For Perimeters) (T4FTW)	32 LED (32L)	700 mA (7)		
	Type 5 Wide (for Improved Uniformity & Wider Pole Spacing) (T5W)	48 LED (48L)	1050 mA (1)		
		64 LED (64L)			
		Performance Plus Configurations*			
	64 LED (64L)	350 mA (35) ⁸			
		530 mA (53) ⁸			

* Performance Plus configurations with our New Performance Silicone Optics.
(For the ultimate performance of the New Performance Silicone Optics combine highest chip count with High Efficacy Drive Currents)

* Performance Plus configurations with our New Performance Silicone Optics.
(For the ultimate performance of the New Performance Silicone Optics combine highest chip count with High Efficacy Drive Currents)

Mounting	Color	Controls Options	Options
Spider Mount (4-Bar) Slips Over 2-3/8" Tenon (SPM2)	Bronze Textured (BRZ)	Nema 7-Pin Receptacle (PE7)	Bird Spikes (BS)
Spider Mount (4-Bar) Slips Over 3" Tenon (SPM3)	White Textured (WHT)	Photocell + Receptacle (PCR)	Marine Grade Finish (MGF)
	Smooth White Gloss (SWT)	Receptacle + Shorting Cap (PER)	Quick Mount Bracket (QMB)
	Silver Metallic (SVR)	FSP-211 w/Motion Sensor/Photocell (120/277VAC, 230-240VAC)	Retrofit Mount Bracket (RQMB)
	Black Textured (BLK)	8' Heights (FSP211-8) ^{4, 10}	Round Pole Adaptor 3"-4" Pole (RPA4)
	Smooth Black Gloss (SBK)	9'-20' Heights (FSP211-20) ^{4, 10}	Round Pole Adaptor 5"-6" Pole (RPA5)
	Graphite Textured (GPH)	21'-40' Heights (FSP211-40) ^{4, 10}	Rotated Optic Left (ROL)
	Grey Textured (GRY)	FSP-221 w/Motion Sensor/Photocell (100/347VAC, 208/230/480VAC)	Rotated Optic Right (ROR)
	Green Textured (GRN)	8' Heights (FSP-HV-8) ¹¹	Single Fuse (SF)
	Hunter Green Textured (HGN)	9'-20' Heights (FSP-HV-20) ¹¹	Double Fuse (DF)
	Custom (CS)	21'-40' Heights (FSP-HV-40) ¹¹	Black Optical Frame (BOF) ¹
		Custom Controls Integration (CCI) ⁹	House Side Shield (HSS)
		Button Type Photocell (PC) ⁴	Buy American Act (BAA) ³
		FSP Remote (FSR) ¹²	Trade Agreement Act (TAA) ³
		DALI-2 (D2) ⁹	Build America Buy American (BABA) ³

NOTES:

1. Consult Factory for Lead Time
2. Consult Factory for 90 CRI Requests
3. Consult factory for all BAA/TAA/BABA requests
4. Universal Voltage 120V-277V
5. 3000K or lower, w/fixed mounting options only. Must be selected to meet International Dark-Sky Association certification
6. Turtle Safe
7. Not available above 530mA
8. 32L & 64L Only with T4FTW & T5W Performance Silicone Micro Optics
9. Please contact Factory for Custom Control Integration requests (nLight, NX, WaveLinx, Crestron, DMX/RDM, Synapse, Casambi, Dali II, Avl-On, or other control systems)
10. FSP-211, 120V/277V, 230-240VAC (single phase), 50/60Hz
11. FSP-221, 100-347VAC (single phase) or 208/230/480VAC (phase-to-phase)
12. Projects with sensors require Qty. 1 FSR per project.
13. See estimated scaling chart for multiplier values to estimate lumen output Please contact Factory to verify the estimated performance data



701 Kingshill Place, Carson, CA 90746
Call Us Today (310) 341-2037

nlsighting.com

PRODUCT SPECIFICATIONS

ELECTRICAL

- 120-277 Volts (UNV) or 347-480 Volts (HV)
- 0-10V dimming driver
- Driver power factor at maximum load is $\geq .95$, THD maximum load is 15%
- LED Drivers Ambient Temp. Min is -40°C and Ambient Temp. Max ranges from 50°C to 55°C and, in some cases, even higher. Consult the factory for revalidation by providing the fixture catalog string before quoting and specifying it.
- All internal wiring UL certified for 600 VAC and 105°C
- All drivers, controls, and sensors housed in enclosed IP-65 compartment
- CRI 70, 80 or 90
- Color temperatures: Amber, Amber/PC, 2700K, 3000K, 3500K, 4000K, 5000K
- Surge Protection: 20KA supplies as standard.

OPTIONS

- **BIRD SPIKES (BS)**—Offers effective and humane deterrent for larger bird species and provides cost-effective long-term solution to nuisance bird infestations and protect your property.
- **MARINE GRADE FINISH (MGF)**—A multi-step process creating protective finishing coat against harsh environments.
 - Chemically washed in a 5 stage cleaning system.
 - Pre-baked
 - Powder coated 3-5 mils of Zinc Rich Super Durable Polyester Primer.
 - 1-2 feet inside pole coverage top and bottom.
 - Oven Baked.
 - Finished Powder Coating of Super Durable Polyester Powder Coat 3-5 mil thickness.
- **HOUSE SIDE SHIELD**—House Side Shield (HSS) is designed for full property line cut-off.
- **ROUND POLE ADAPTER (RPA)**— When using round poles, specify Round Pole Adapter (RPA). Specify RPA4 when installing on 3"-4" round poles, and RPA5 when installing on 5"-6" round poles.
- **ROTATED OPTICS (ROL) (ROR)** - Rotated optics are designed for perimeter lighting for auto dealerships
- **BLACK OPTIC FRAME (BOF)** - Optional black optic frame. (includes black hardware) Standard is white
- **HAL LENS (HAL)** - High Performance Yellow Polycarbonate Lens – less than 2% Blue Light Content

CONTROLS


- **FSP-211 w/Motion Sensor/Photocell (120/277VAC, 230-240VAC)** (FSP-X) - Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution.
- **FSP-221 w/Motion Sensor/Photocell (100-347VAC, 208/230/480VAC)** (FSP-HV-X) - Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution.
 - All control parameters adjustable via wireless configuration remote storing and transmitting sensor profiles.
 - FSP-8 mounting heights 8 feet and below
 - FSP-20 mounting heights 9-20 feet.
 - FSP-40 mounting heights 21-40 feet.
 - Can maintain constant foot candles over time. Consult Factory
 - Includes 5 dimming event cycles, 0-10V dimming with motion sensing, re-programmable in the field.
 - FSIR-100 commissioning remote is required to change sensor settings. Please contact factory for ordering.

- **NEMA 7-PIN RECEPTACLE (PE7)**—An ANSI C136.41-2013 receptacle provides electrical and mechanical interconnection between photo control cell and luminaire. Dimming receptacle available two or four dimming contacts supports 0-10 VDC dimming methods or Digital Addressable Lighting Interface (DALI), providing reliable power interconnect.
- **Controls Agnostic:** Please contact factory for your preferred controls option. (nLight, NX, WaveLinx, Crestron, DMX/RDM, Synapse, Casambi, DALI II, Avi-On, or other control systems)

OPTICS

Silicone optics high photothermal stability and light output provides higher powered LEDs with minimized lumen depreciation LED life. UV and thermal stability with scratch resistance increases exterior application durability.

- IES Types

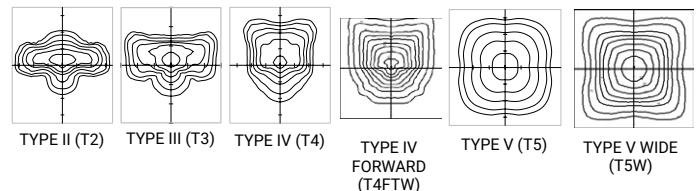

FINISH

- 5 mils electrostatic powder coat.
- NLS' standard high-quality finishes prevent corrosion protects against extreme environmental conditions

WARRANTY

Five-year limited warranty for drivers and LEDs.

LISTINGS

- UL Listed in compliance with UL 1598, the Standard for Safety of Luminaires, including the applicable wet location requirements
- CSA C22.2 No. 250.0
- IP65/ IP67 Rated
- Dark Sky Approved
- IK10 Rated

BUY AMERICAN OPTION

While all of the NLS Lighting products listed in this document qualify for the Buy America(n) Act of 1933, we reserve the right to change our listings without notice.

The information provided above is for general informational purposes only. We encourage you to consult legal professionals for advice particular to your projects concerning BAA, TAA, BABA or Buy America.

Additional NLS Products that meet BAA, TAA standards can be found at the following link:

<https://nlsighting.com/buy-american/>



The information and specifications on this document are subject to change without any notification. All values are design, nominal, typical or prorated values when measured under internal and external laboratory conditions.



701 Kingshill Place, Carson, CA 90746
Call Us Today (310) 341-2037


nlsighting.com

PRODUCT SPECIFICATIONS


DIMENSION	VSR-1
A	17 in.
B	6 in.
Weight	15 lbs

EPA


EPA	SGL	D90	D180	T90	T120	QD
VSR-1	.33	.66	.66	1.0	1.0	1.32

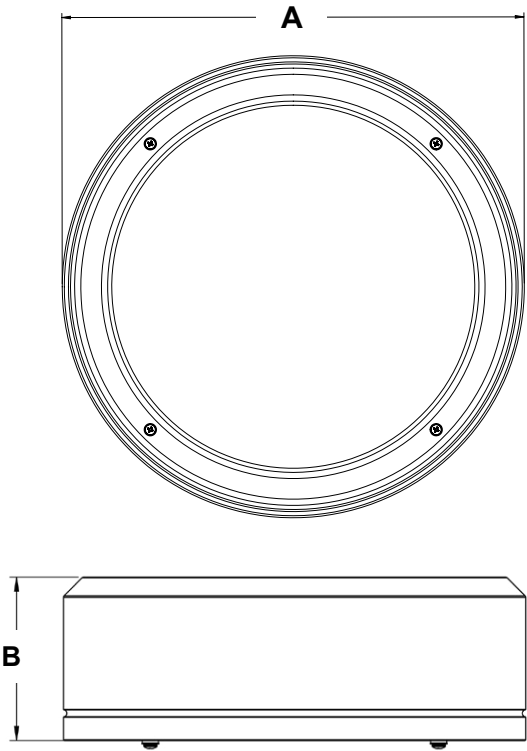


OPTICAL CONFIGURATIONS



VSR-1 / 32L




VSR-1 / 48L




VSR-1 / 64L

PRODUCT SPECIFICATIONS


LED KELVIN RANGE




AMBER
585-600 nm




2700K 70 CRI




3000K 70 CRI



3500K 80 CRI



4000K 70 CRI



5000K 70 CRI

Color	Dominant or Peak Wavelength Range (nm)	
	Minimum	Maximum
Amber	585	600

Lumen Maintenance Data							
Ambient Temperature	Drive Current	L90 Hours*	L70 Hours	30,000 Hours*	50,000 Hours*	60,000 Hours*	100,000 Hours*
25°C	up to 700mA	58,000	173,000	95.7%	91.6%	89.6%	82.1%
	1050mA	38,000	96,000	93.0%	85.4%	81.8%	68.8%
*Reported extrapolations per IESNA TM-21				**Projected extrapolations per IESNA TM-21			

LUMEN MULTIPLIERS

Multipliers For 70/80/90 CRI (Scaling Factor from 5000K 70 CRI)			
CCT	70 CRI	80 CRI	90 CRI
2700K	0.840	0.737	0.609
3000K	0.975	0.776	0.640
3500K	0.890	0.800	0.659
4000K	1.000	0.815	0.679
5000K	1.000	0.830	0.710

Multipliers For Amber & PC Amber (Scaling Factor from 5000K 70 CRI)	
CCT	Multiplier
AMBER - Amber LED 595nm Dominant Wavelength - Standard Turtle Friendly	Consult Factory for estimated lumens and wattage
AMBER/PC - Amber LED Phosphor Converted	Consult Factory for estimated lumens and wattage

LENS MULTIPLIERS

Lens Type	Multiplier
CFL - Clear Tempered Glass Lens	0.8500
DPCL - Diffused Polycarbonate Visual Comfort Lens	0.6000
HAL - Yellow Polycarbonate Lens - less than 2% Blue Light Content	0.7000

PRODUCT SPECIFICATIONS

LUMEN CHARTS - STANDARD MICRO OPTICS

STANDARD SILICONE MICRO OPTICS - NON-SHIELDED - 32 LED									
Part Number	T2	LPW	T3	LPW	T4	LPW	T5	LPW	Wattage
VSR-1-32L-7-27K7	6870	97	7290	103	7304	103	7618	107	71
VSR-1-32L-7-27K8	6433	91	6826	96	6839	96	7134	100	71
VSR-1-32L-7-30K7	7427	105	7881	111	7896	111	8236	116	71
VSR-1-32L-7-30K8	6897	97	7319	103	7333	103	7649	108	71
VSR-1-32L-7-35K8	6897	97	7319	103	7333	103	7649	108	71
VSR-1-32L-7-40K7	8169	115	8669	122	8685	122	9088	128	71
VSR-1-32L-7-40K8	7561	106	8024	113	8039	113	8412	118	71
VSR-1-32L-7-50K7	8169	115	8669	122	8685	122	9088	128	71
VSR-1-32L-7-50K8	7561	106	8024	113	8039	113	8412	118	71
VSR-1-32L-1-27K7	10256	97	10001	94	9911	94	10295	97	106
VSR-1-32L-1-27K8	9604	91	9365	88	9281	88	9641	91	106
VSR-1-32L-1-30K7	11088	105	10812	102	10715	101	11130	105	106
VSR-1-32L-1-30K8	10297	97	10041	95	9951	94	10336	98	106
VSR-1-32L-1-35K8	10297	97	10041	95	9951	94	10336	98	106
VSR-1-32L-1-40K7	12196	115	11893	112	11787	111	12296	116	106
VSR-1-32L-1-40K8	11289	106	11008	104	10910	103	11381	107	106
VSR-1-32L-1-50K7	12196	115	11893	112	11787	111	12296	116	106
VSR-1-32L-1-50K8	11289	106	11008	104	10910	103	11381	107	106

STANDARD SILICONE MICRO OPTICS - SHIELDED - 32 LED					
Part Number	T3 HSS	LPW	T4 HSS	LPW	Wattage
VSR-1-32L-7-27K7-HSS	6870	97	7304	103	71
VSR-1-32L-7-27K8-HSS	6433	91	6839	96	71
VSR-1-32L-7-30K7-HSS	7427	105	7896	111	71
VSR-1-32L-7-30K8-HSS	6897	97	7333	103	71
VSR-1-32L-7-35K8-HSS	6897	97	7333	103	71
VSR-1-32L-7-40K7-HSS	8169	115	8685	122	71
VSR-1-32L-7-40K8-HSS	7561	106	8039	113	71
VSR-1-32L-7-50K7-HSS	8169	115	8685	122	71
VSR-1-32L-7-50K8-HSS	7561	106	8039	113	71
VSR-1-32L-1-27K7-HSS	10256	97	9911	94	106
VSR-1-32L-1-27K8-HSS	9604	91	9281	88	106
VSR-1-32L-1-30K7-HSS	11088	105	10715	101	106
VSR-1-32L-1-30K8-HSS	10297	97	9951	94	106
VSR-1-32L-1-35K8-HSS	10297	97	9951	94	106
VSR-1-32L-1-40K7-HSS	12196	115	11787	111	106
VSR-1-32L-1-40K8-HSS	11289	106	10910	103	106
VSR-1-32L-1-50K7-HSS	12196	115	11787	111	106
VSR-1-32L-1-50K8-HSS	11289	106	10910	103	106

STANDARD SILICONE MICRO OPTICS - NON-SHIELDED - 48 LED									
Part Number	T2	LPW	T3	LPW	T4	LPW	T5	LPW	Wattage
VSR-1-48L-7-27K7	10955	105	10678	103	10774	104	11163	107	104
VSR-1-48L-7-27K8	10259	99	9999	96	10089	97	10453	101	104
VSR-1-48L-7-30K7	11844	114	11544	111	11648	112	12068	116	104
VSR-1-48L-7-30K8	10999	106	10721	103	10817	104	11207	108	104
VSR-1-48L-7-35K8	10999	106	10721	103	10817	104	11207	108	104
VSR-1-48L-7-40K7	13028	125	12698	122	12792	123	13275	128	104
VSR-1-48L-7-40K8	12059	116	11753	113	11840	114	12288	118	104
VSR-1-48L-7-50K7	13028	125	12698	122	12792	123	13275	128	104
VSR-1-48L-7-50K8	12059	116	11753	113	11840	114	12288	118	104
VSR-1-48L-1-27K7	15094	97	14718	94	14586	93	15220	98	156
VSR-1-48L-1-27K8	14134	91	13783	88	13659	88	14253	91	156
VSR-1-48L-1-30K7	16318	105	15912	102	15769	101	16455	105	156
VSR-1-48L-1-30K8	15154	97	14777	95	14644	94	15281	98	156
VSR-1-48L-1-35K8	15154	97	14777	95	14644	94	15281	98	156
VSR-1-48L-1-40K7	17950	115	17503	112	17346	111	18100	116	156
VSR-1-48L-1-40K8	16615	107	16201	104	16056	103	16754	107	156
VSR-1-48L-1-50K7	17950	115	17503	112	17346	111	18100	116	156
VSR-1-48L-1-50K8	16615	107	16201	104	16056	103	16754	107	156

STANDARD SILICONE MICRO OPTICS - SHIELDED - 48 LED					
Part Number	T3 HSS	LPW	T4 HSS	LPW	Wattage
VSR-1-48L-7-27K7-HSS	10955	105	10774	104	104
VSR-1-48L-7-27K8-HSS	10259	99	10089	97	104
VSR-1-48L-7-30K7-HSS	11844	114	11648	112	104
VSR-1-48L-7-30K8-HSS	10999	106	10817	104	104
VSR-1-48L-7-35K8-HSS	10999	106	10817	104	104
VSR-1-48L-7-40K7-HSS	13028	125	12792	123	104
VSR-1-48L-7-40K8-HSS	12059	116	11840	114	104
VSR-1-48L-7-50K7-HSS	13028	125	12792	123	104
VSR-1-48L-7-50K8-HSS	12059	116	11840	114	104
VSR-1-48L-1-27K7-HSS	15094	97	14586	93	156
VSR-1-48L-1-27K8-HSS	14134	91	13659	88	156
VSR-1-48L-1-30K7-HSS	16318	105	15769	101	156
VSR-1-48L-1-30K8-HSS	15154	97	14644	94	156
VSR-1-48L-1-35K8-HSS	15154	97	14644	94	156
VSR-1-48L-1-40K7-HSS	17950	115	17346	111	156
VSR-1-48L-1-40K8-HSS	16615	107	16056	103	156
VSR-1-48L-1-50K7-HSS	17950	115	17346	111	156
VSR-1-48L-1-50K8-HSS	16615	107	16056	103	156

PRODUCT SPECIFICATIONS

LUMEN CHARTS - STANDARD MICRO OPTICS

STANDARD SILICONE MICRO OPTICS - NON-SHIELDED - 64 LED									
Part Number	T2	LPW	T3	LPW	T4	LPW	T5	LPW	Wattage
VSR-1-64L-7-27K7	14326	105	13963	103	13989	103	14597	107	136
VSR-1-64L-7-27K8	13416	99	13076	96	13100	96	13669	101	136
VSR-1-64L-7-30K7	15488	114	15096	111	15124	111	15781	116	136
VSR-1-64L-7-30K8	14383	106	14019	103	14045	103	14655	108	136
VSR-1-64L-7-35K8	14383	106	14019	103	14045	103	14655	108	136
VSR-1-64L-7-40K7	17037	125	16606	122	16728	123	17359	128	136
VSR-1-64L-7-40K8	15770	116	15371	113	15484	114	16068	118	136
VSR-1-64L-7-50K7	17037	125	16606	122	16728	123	17359	128	136
VSR-1-64L-7-50K8	15770	116	15371	113	15484	114	16068	118	136
VSR-1-64L-1-27K7	19834	97	19341	94	19167	93	20001	98	205
VSR-1-64L-1-27K8	18574	91	18112	88	17949	88	18730	91	205
VSR-1-64L-1-30K7	21443	105	20910	102	20722	101	21623	105	205
VSR-1-64L-1-30K8	19914	97	19419	95	19244	94	20081	98	205
VSR-1-64L-1-35K8	19914	97	19419	95	19244	94	20081	98	205
VSR-1-64L-1-40K7	23588	115	23001	112	22795	111	23785	116	205
VSR-1-64L-1-40K8	21833	107	21290	104	21099	103	22016	107	205
VSR-1-64L-1-50K7	23588	115	23001	112	22795	111	23785	116	205
VSR-1-64L-1-50K8	21833	107	21290	104	21099	103	22016	107	205

STANDARD SILICONE MICRO OPTICS - SHIELDED - 64 LED					
Part Number	T3 HSS	LPW	T4 HSS	LPW	Wattage
VSR-1-64L-7-27K7-HSS	14326	105	13989	103	136
VSR-1-64L-7-27K8-HSS	13416	99	13100	96	136
VSR-1-64L-7-30K7-HSS	15488	114	15124	111	136
VSR-1-64L-7-30K8-HSS	14383	106	14045	103	136
VSR-1-64L-7-35K8-HSS	14383	106	14045	103	136
VSR-1-64L-7-40K7-HSS	17037	125	16728	123	136
VSR-1-64L-7-40K8-HSS	15770	116	15484	114	136
VSR-1-64L-7-50K7-HSS	17037	125	16728	123	136
VSR-1-64L-7-50K8-HSS	15770	116	15484	114	136
VSR-1-64L-1-27K7-HSS	19834	97	19167	93	205
VSR-1-64L-1-27K8-HSS	18574	91	17949	88	205
VSR-1-64L-1-30K7-HSS	21443	105	20722	101	205
VSR-1-64L-1-30K8-HSS	19914	97	19244	94	205
VSR-1-64L-1-35K8-HSS	19914	97	19244	94	205
VSR-1-64L-1-40K7-HSS	23588	115	22795	111	205
VSR-1-64L-1-40K8-HSS	21833	107	21099	103	205
VSR-1-64L-1-50K7-HSS	23588	115	22795	111	205
VSR-1-64L-1-50K8-HSS	21833	107	21099	103	205

LUMEN CHARTS - PERFORMANCE MICRO OPTICS

PERFORMANCE SILICONE MICRO OPTICS - NON-SHIELDED - 32 LED					
Part Number	T4FTW	LPW	T5W	LPW	Wattage
VSR-1-32L-7-27K7	6391	90	7770	109	71
VSR-1-32L-7-27K8	5985	84	7276	102	71
VSR-1-32L-7-30K7	6910	97	8481	119	71
VSR-1-32L-7-30K8	6417	90	7876	111	71
VSR-1-32L-7-35K8	6417	90	7876	111	71
VSR-1-32L-7-40K7	7466	105	9077	128	71
VSR-1-32L-7-40K8	6911	97	8402	118	71
VSR-1-32L-7-50K7	7466	105	9077	128	71
VSR-1-32L-7-50K8	6911	97	8402	118	71
VSR-1-32L-1-27K7	9501	90	10645	100	106
VSR-1-32L-1-27K8	8897	84	9968	94	106
VSR-1-32L-1-30K7	10272	97	11510	109	106
VSR-1-32L-1-30K8	9539	90	10689	101	106
VSR-1-32L-1-35K8	9539	90	10689	101	106
VSR-1-32L-1-40K7	11099	105	12436	117	106
VSR-1-32L-1-40K8	10273	97	11511	109	106
VSR-1-32L-1-50K7	11099	105	12436	117	106
VSR-1-32L-1-50K8	10273	97	11511	109	106

PERFORMANCE SILICONE MICRO OPTICS - NON-SHIELDED - 48 LED					
Part Number	T4FTW	LPW	T5W	LPW	Wattage
VSR-1-48L-7-27K7	10149	98	11573	111	104
VSR-1-48L-7-27K8	9504	91	10838	104	104
VSR-1-48L-7-30K7	10973	106	12513	120	104
VSR-1-48L-7-30K8	10190	98	11621	112	104
VSR-1-48L-7-35K8	10190	98	11621	112	104
VSR-1-48L-7-40K7	11856	114	13520	130	104
VSR-1-48L-7-40K8	10974	106	12514	120	104
VSR-1-48L-7-50K7	11856	114	13520	130	104
VSR-1-48L-7-50K8	10974	106	12514	120	104
VSR-1-48L-1-27K7	14718	96	15159	98	154
VSR-1-48L-1-27K8	13783	89	14196	92	154
VSR-1-48L-1-30K7	15913	103	16391	106	154
VSR-1-48L-1-30K8	14778	96	15222	99	154
VSR-1-48L-1-35K8	14778	96	15222	99	154
VSR-1-48L-1-40K7	17194	112	17710	115	154
VSR-1-48L-1-40K8	15915	103	16393	106	154
VSR-1-48L-1-50K7	17194	112	17710	115	154
VSR-1-48L-1-50K8	15915	103	16393	106	154

PRODUCT SPECIFICATIONS

LUMEN CHARTS - PERFORMANCE MICRO OPTICS

PERFORMANCE SILICONE MICRO OPTICS - NON-SHIELDED - 64 LED					
Part Number	T4FTW	LPW	T5W	LPW	Wattage
VSR-1-64L-35-27K7	7742	114	8324	122	68
VSR-1-64L-35-27K8	7250	107	7795	115	68
VSR-1-64L-35-30K7	8370	123	9000	132	68
VSR-1-64L-35-30K8	7773	114	8358	123	68
VSR-1-64L-35-35K8	7773	114	8358	123	68
VSR-1-64L-35-40K7	9044	133	9724	143	68
VSR-1-64L-35-40K8	8371	123	9001	132	68
VSR-1-64L-35-50K7	9044	133	9724	143	68
VSR-1-64L-35-50K8	8371	123	9001	132	68
VSR-1-64L-53-27K7	10846	105	12521	122	103
VSR-1-64L-53-27K8	10156	99	11725	114	103
VSR-1-64L-53-30K7	11725	114	13537	131	103
VSR-1-64L-53-30K8	10889	106	12571	122	103
VSR-1-64L-53-35K8	10889	106	12571	122	103
VSR-1-64L-53-40K7	12669	123	14626	142	103
VSR-1-64L-53-40K8	11727	114	13538	131	103
VSR-1-64L-53-50K7	12669	123	14626	142	103
VSR-1-64L-53-50K8	11727	114	13538	131	103
VSR-1-64L-7-27K7	11517	83	14482	104	139
VSR-1-64L-7-27K8	10785	78	13562	98	139
VSR-1-64L-7-30K7	12452	90	15658	113	139
VSR-1-64L-7-30K8	11564	83	14541	105	139
VSR-1-64L-7-35K8	11564	83	14541	105	139
VSR-1-64L-7-40K7	13454	97	16919	122	139
VSR-1-64L-7-40K8	12453	90	15660	113	139
VSR-1-64L-7-50K7	13454	97	16919	122	139
VSR-1-64L-7-50K8	12453	90	15660	113	139
VSR-1-64L-1-27K7	16844	81	18826	91	207
VSR-1-64L-1-27K8	15774	76	17630	85	207
VSR-1-64L-1-30K7	18212	88	20355	98	207
VSR-1-64L-1-30K8	16913	82	18903	91	207
VSR-1-64L-1-35K8	16913	82	18903	91	207
VSR-1-64L-1-40K7	19678	95	21993	106	207
VSR-1-64L-1-40K8	18214	88	20357	98	207
VSR-1-64L-1-50K7	19678	95	21993	106	207
VSR-1-64L-1-50K8	18214	88	20357	98	207

PRODUCT SPECIFICATIONS

BUG RATING CHARTS - STANDARD MICRO OPTICS

STANDARD SILICONE MICRO OPTICS - NON-SHIELDED - 32 LED				
Part Number	T2	T3	T4	T5
VSR-1-32L-7-27K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-27K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-30K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-30K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-35K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-40K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-40K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-50K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-50K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
VSR-1-32L-1-27K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-27K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-30K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-30K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-35K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-40K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-40K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-50K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-32L-1-50K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2

STANDARD SILICONE MICRO OPTICS - SHIELDED - 32 LED		
Part Number	T3 HSS	T4 HSS
VSR-1-32L-7-27K7-HSS	B0-U0-G1	B0-U0-G1
VSR-1-32L-7-27K8-HSS	B0-U0-G1	B0-U0-G1
VSR-1-32L-7-30K7-HSS	B0-U0-G1	B0-U0-G1
VSR-1-32L-7-30K8-HSS	B0-U0-G1	B0-U0-G1
VSR-1-32L-7-35K8-HSS	B0-U0-G1	B0-U0-G1
VSR-1-32L-7-40K7-HSS	B0-U0-G1	B0-U0-G2
VSR-1-32L-7-40K8-HSS	B0-U0-G1	B0-U0-G2
VSR-1-32L-7-50K7-HSS	B0-U0-G1	B0-U0-G2
VSR-1-32L-7-50K8-HSS	B0-U0-G1	B0-U0-G2
VSR-1-32L-1-27K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-27K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-30K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-30K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-35K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-40K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-40K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-50K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-32L-1-50K8-HSS	B0-U0-G2	B0-U0-G2

STANDARD SILICONE MICRO OPTICS - NON-SHIELDED - 48 LED				
Part Number	T2	T3	T4	T5
VSR-1-48L-7-27K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-27K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-30K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-30K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-35K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-40K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-40K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-50K7	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-7-50K8	B2-U0-G2	B2-U0-G2	B2-U0-G2	B4-U0-G2
VSR-1-48L-1-27K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-27K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-30K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-30K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-35K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-40K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-40K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-50K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-48L-1-50K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2

STANDARD SILICONE MICRO OPTICS - SHIELDED - 48 LED		
Part Number	T3 HSS	T4 HSS
VSR-1-48L-7-27K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-27K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-30K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-30K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-35K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-40K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-40K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-50K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-7-50K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-1-27K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-1-27K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-1-30K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-1-30K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-1-35K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-48L-1-40K7-HSS	B1-U0-G2	B0-U0-G2
VSR-1-48L-1-40K8-HSS	B1-U0-G2	B0-U0-G2
VSR-1-48L-1-50K7-HSS	B1-U0-G2	B0-U0-G2
VSR-1-48L-1-50K8-HSS	B1-U0-G2	B0-U0-G2

PRODUCT SPECIFICATIONS

BUG RATING CHARTS - STANDARD MICRO OPTICS

STANDARD SILICONE MICRO OPTICS - NON-SHIELDED - 64 LED				
Part Number	T2	T3	T4	T5
VSR-1-64L-7-27K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-27K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-30K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-30K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-35K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-40K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-40K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-50K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-7-50K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
VSR-1-64L-1-27K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-27K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-30K7	B3-U0-G3	B3-U0-G3	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-30K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-35K8	B3-U0-G3	B3-U0-G3	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-40K7	B3-U0-G3	B3-U0-G3	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-40K8	B3-U0-G3	B3-U0-G3	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-50K7	B3-U0-G3	B3-U0-G3	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-50K8	B3-U0-G3	B3-U0-G3	B3-U0-G4	B5-U0-G3

STANDARD SILICONE MICRO OPTICS - SHIELDED - 64 LED		
Part Number	T3 HSS	T4 HSS
VSR-1-64L-7-27K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-64L-7-27K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-64L-7-30K7-HSS	B0-U0-G2	B0-U0-G2
VSR-1-64L-7-30K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-64L-7-35K8-HSS	B0-U0-G2	B0-U0-G2
VSR-1-64L-7-40K7-HSS	B0-U0-G2	B1-U0-G2
VSR-1-64L-7-40K8-HSS	B0-U0-G2	B1-U0-G2
VSR-1-64L-7-50K7-HSS	B0-U0-G2	B1-U0-G2
VSR-1-64L-7-50K8-HSS	B0-U0-G2	B1-U0-G2
VSR-1-64L-1-27K7-HSS	B1-U0-G2	B1-U0-G2
VSR-1-64L-1-27K8-HSS	B1-U0-G2	B1-U0-G2
VSR-1-64L-1-30K7-HSS	B1-U0-G2	B1-U0-G2
VSR-1-64L-1-30K8-HSS	B1-U0-G2	B1-U0-G2
VSR-1-64L-1-35K8-HSS	B1-U0-G2	B1-U0-G2
VSR-1-64L-1-40K7-HSS	B1-U0-G2	B1-U0-G3
VSR-1-64L-1-40K8-HSS	B1-U0-G2	B1-U0-G3
VSR-1-64L-1-50K7-HSS	B1-U0-G2	B1-U0-G3
VSR-1-64L-1-50K8-HSS	B1-U0-G2	B1-U0-G3

BUG RATING CHARTS - PERFORMANCE MICRO OPTICS

PERFORMANCE SILICONE MICRO OPTICS - SHIELDED - 32 LED		
Part Number	T4FTW	T5W
VSR-1-32L-7-27K7	B1-U0-G2	B3-U0-G2
VSR-1-32L-7-27K8	B1-U0-G2	B3-U0-G2
VSR-1-32L-7-30K7	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-30K8	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-35K8	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-40K7	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-40K8	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-50K7	B2-U0-G2	B3-U0-G2
VSR-1-32L-7-50K8	B2-U0-G2	B3-U0-G2
VSR-1-32L-1-27K7	B2-U0-G3	B4-U0-G2
VSR-1-32L-1-27K8	B2-U0-G3	B4-U0-G2
VSR-1-32L-1-30K7	B2-U0-G3	B4-U0-G2
VSR-1-32L-1-30K8	B2-U0-G3	B4-U0-G2
VSR-1-32L-1-35K8	B2-U0-G3	B4-U0-G2
VSR-1-32L-1-40K7	B2-U0-G3	B4-U0-G3
VSR-1-32L-1-40K8	B2-U0-G3	B4-U0-G3
VSR-1-32L-1-50K7	B2-U0-G3	B4-U0-G3
VSR-1-32L-1-50K8	B2-U0-G3	B4-U0-G3

PERFORMANCE SILICONE MICRO OPTICS - SHIELDED - 48 LED		
Part Number	T4FTW	T5W
VSR-1-48L-7-27K7	B2-U0-G3	B4-U0-G2
VSR-1-48L-7-27K8	B2-U0-G3	B4-U0-G2
VSR-1-48L-7-30K7	B2-U0-G3	B4-U0-G3
VSR-1-48L-7-30K8	B2-U0-G3	B4-U0-G3
VSR-1-48L-7-35K8	B2-U0-G3	B4-U0-G3
VSR-1-48L-7-40K7	B2-U0-G3	B4-U0-G3
VSR-1-48L-7-40K8	B2-U0-G3	B4-U0-G3
VSR-1-48L-7-50K7	B2-U0-G3	B4-U0-G3
VSR-1-48L-7-50K8	B2-U0-G3	B4-U0-G3
VSR-1-48L-1-27K7	B3-U0-G3	B4-U0-G3
VSR-1-48L-1-27K8	B3-U0-G3	B4-U0-G3
VSR-1-48L-1-30K7	B3-U0-G4	B4-U0-G3
VSR-1-48L-1-30K8	B3-U0-G4	B4-U0-G3
VSR-1-48L-1-35K8	B3-U0-G4	B4-U0-G3
VSR-1-48L-1-40K7	B3-U0-G4	B5-U0-G3
VSR-1-48L-1-40K8	B3-U0-G4	B5-U0-G3
VSR-1-48L-1-50K7	B3-U0-G4	B5-U0-G3
VSR-1-48L-1-50K8	B3-U0-G4	B5-U0-G3

PRODUCT SPECIFICATIONS

BUG RATING CHARTS - PERFORMANCE MICRO OPTICS


PERFORMANCE SILICONE MICRO OPTICS - SHIELDED - 64 LED		
Part Number	T4FTW	T5W
VSR-1-64L-35-27K7	B2-U0-G2	B4-U0-G2
VSR-1-64L-35-27K8	B1-U0-G2	B3-U0-G2
VSR-1-64L-35-30K7	B2-U0-G3	B4-U0-G2
VSR-1-64L-35-30K8	B2-U0-G2	B4-U0-G2
VSR-1-64L-35-35K8	B2-U0-G2	B4-U0-G2
VSR-1-64L-35-40K7	B2-U0-G3	B4-U0-G2
VSR-1-64L-35-40K8	B2-U0-G3	B4-U0-G2
VSR-1-64L-35-50K7	B2-U0-G3	B4-U0-G2
VSR-1-64L-35-50K8	B2-U0-G3	B4-U0-G2
VSR-1-64L-53-27K7	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-27K8	B2-U0-G3	B4-U0-G2
VSR-1-64L-53-30K7	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-30K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-35K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-40K7	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-40K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-50K7	B2-U0-G3	B4-U0-G3
VSR-1-64L-53-50K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-7-27K7	B2-U0-G3	B4-U0-G3
VSR-1-64L-7-27K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-7-30K7	B2-U0-G3	B4-U0-G3
VSR-1-64L-7-30K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-7-35K8	B2-U0-G3	B4-U0-G3
VSR-1-64L-7-40K7	B3-U0-G3	B4-U0-G3
VSR-1-64L-7-40K8	B3-U0-G3	B4-U0-G3
VSR-1-64L-7-50K7	B3-U0-G3	B4-U0-G3
VSR-1-64L-7-50K8	B3-U0-G3	B4-U0-G3
VSR-1-64L-1-27K7	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-27K8	B3-U0-G3	B5-U0-G3
VSR-1-64L-1-30K7	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-30K8	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-35K8	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-40K7	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-40K8	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-50K7	B3-U0-G4	B5-U0-G3
VSR-1-64L-1-50K8	B3-U0-G4	B5-U0-G3

PRODUCT SPECIFICATIONS


SPIDER MOUNT (SPMX)

Aluminum, 4-bar spider arm mounts over round tenon at two outer dimensions:


- Over 2-3/8" (SPM2)
- Over 3" (SPM3)

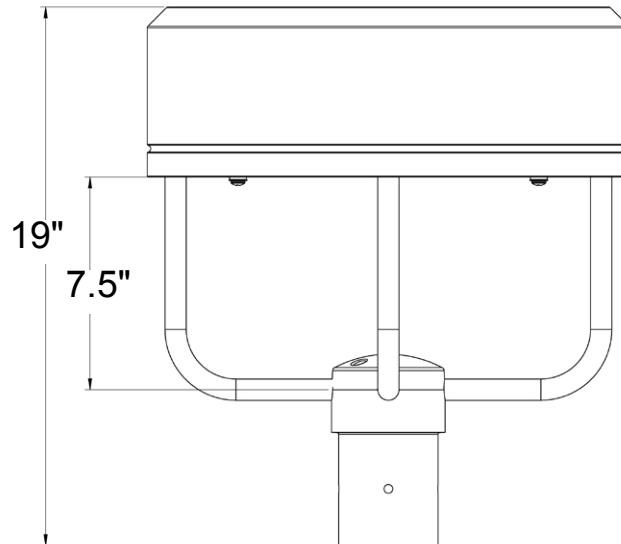

HOUSE SIDE SHIELD

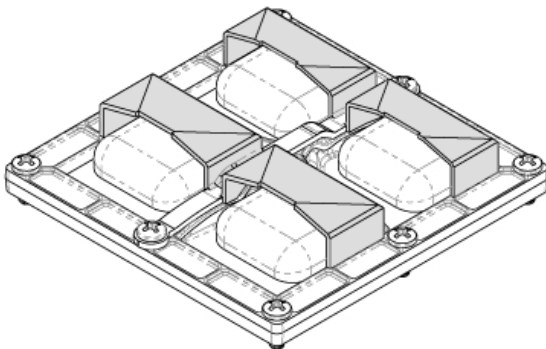

AUTOMOTIVE HOUSE SIDE SHIELD

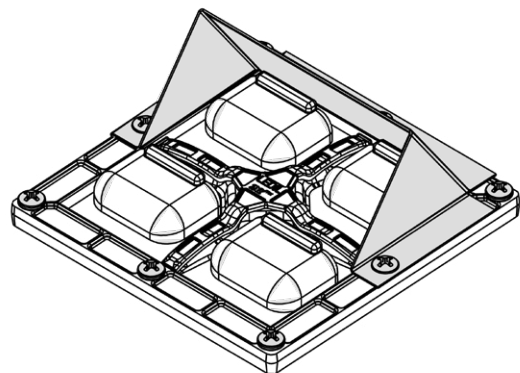

PRODUCT SPECIFICATIONS


CONTROL OPTIONS

- DIMMING CONTROL (FSP)—Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution
- All control parameters adjustable via wireless configuration remote storing and transmitting sensor profiles.
- FSP-8 mounting heights 8 feet and below
- FSP-20 mounting heights 9-20 feet.
- FSP-40 mounting heights 21-40 feet.
- Includes 5 dimming event cycles, 0-10V dimming with motion sensing, re-programmable in the field.

FSP-211 WITH MOTION SENSOR (FSP-XX)

- FSP-211(FSP-X)—Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution.
- 120/277VAC, 230-240VAC
- All control parameters adjustable via wireless configuration remote storing and transmitting sensor profiles.
- FSP-8 mounting heights 8 feet and below
- FSP-20 mounting heights 9-20 feet.
- FSP-40 mounting heights 21-40 feet.
- Includes 5 dimming event cycles, 0-10V dimming with motion sensing, re-programmable in the field.


FSP-211



FSP-221 WITH MOTION SENSOR (FSP-HV-XX)


- FSP-221 (FSP-HV-X)—Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution.
- 100-347VAC 208/230/480VAC
- All control parameters adjustable via wireless configuration remote storing and transmitting sensor profiles.
- FSP-8 mounting heights 8 feet and below
- FSP-20 mounting heights 9-20 feet.
- FSP-40 mounting heights 21-40 feet.
- Includes 5 dimming event cycles, 0-10V dimming with motion sensing, re-programmable in the field.

FSP-221





FSP-8

Coverage Top View @ 12ft.





FSP-20

Coverage Top View @ 20 ft.



FSP-40


Coverage Top View @ 40ft

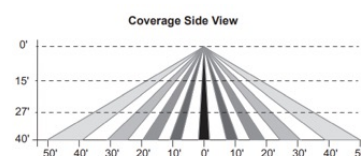

PRODUCT SPECIFICATIONS


PHOTOCELL + RECEPTACLE (PCR)

7-Pin Receptacle and Electronic Twist Lock Photocell for dusk to dawn operation.

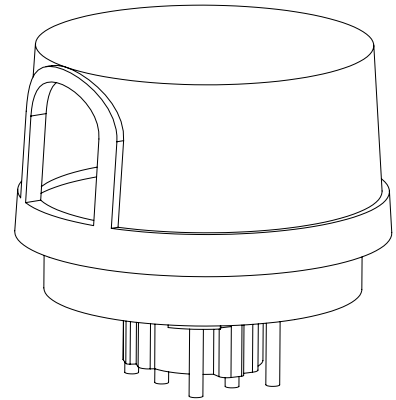


RECEPTACLE + SHORTING CAP (PER)

7-Pin Receptacle and Shorting Cap.

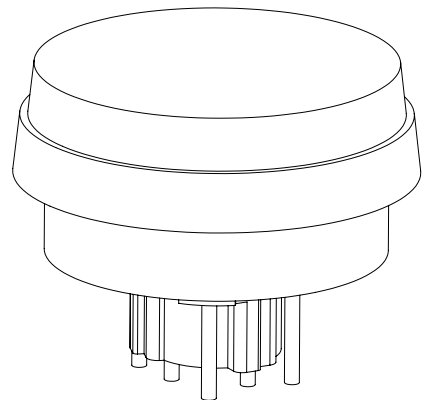

NEMA 7-PIN RECEPTACLE (PE7)


An ANSI C136.41-2013 receptacle provides electrical and mechanical interconnection between photo control cell and luminaire. Dimming receptacle available two or four dimming contacts supports 0-10 VDC dimming methods or Digital Addressable Lighting Interface (DALI), providing reliable power interconnect.

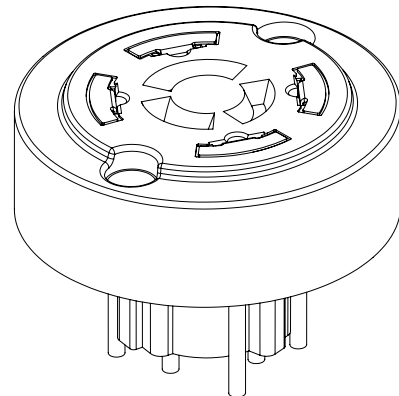

PRODUCT SPECIFICATIONS

BIRD SPIKES (BS)

Bird Spikes offers effective and humane deterrent for larger bird species and provides cost-effective long-term solution to nuisance bird infestations and protect your property.

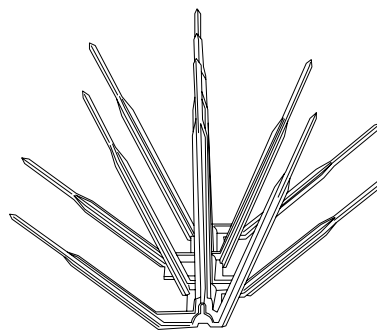

MARINE GRADE FINISH (MGF)

The **(MGF)** is a multi step process. Chemically washed in a 5 stage cleaning system. Pre-baked. Powder coated 3-5 mils of Zinc Rich Super Durable Polyester Primer. Oven Baked. Finished Powder Coating of Super Durable Polyester Powder Coat 3-5 mil thickness.



Powder Coat Finish

3-5 mil Powder Coat

Primer Layer


3-5 mil Zinc Rich Super Durable Polyester Primer

Prepared Casting

Chemically washed in multi Step 5 stage cleaning process

BUTTON PHOTOCELL

Photo Cell for dusk to dawn operation.



SHIELDING OPTIONS (HSS)

SHIELDS (HSS)—House Side Shield (HSS) is designed for full property line cut-off.

HOUSE SIDE SHIELD

